

No. : CZIN2303000023CM-01

Date: Mar 27, 2023

Page: 1 of 6

CUSTOMER NAME: ADDRESS: LAMELIO 010 01 ZILINA, SLOVAKIA

Sample Name : ACOUSTIC WALL PANEL

Above information and sample(s) was/were submitted and confirmed by the client. SGS, however, assumes no responsibility to verify the accuracy, adequacy and completeness of the sample information provided by client.

Test Required	:	Sound Absorption Coefficient
SGS Ref. No. :		SHIN2303000487CM
Ref. Standard : E		EN 15102:2019 Clause 4.7 & EN ISO 354:2003
Date of Receipt	:	Mar 07, 2023
Testing Start Date	:	Mar 07, 2023
Testing End Date	:	Mar 27, 2023
Test result(s)	:	For further details, please refer to the following page(s) (Unless otherwise stated the results shown in this test report refer only to the sample(s) tested)

Signed for SGS-CSTC Standards Technical Service (Changzhou)Co., Ltd.

Im fam

Tiffany Liu Authorized signatory

SGS-C Comm

Unless otherwise agreed in writing, this d overleaf, available on request or accessible subject to Terms and Conditions for Elect Attention is drawn to the limitation of liabil advised that information contained hereon Client's instructions, if any. The Company transaction from exercising all their rights except in full, without prior written approv appearance of this document is unlawful ar results shown in this test report refer only to Attention: To check the authenticity of ter- or email: CN.Doccheck@sgs.com No.3, Hehai East Road, Tianning District, Changzho 中国 · 常州 · 天宁区河海东路3号	e at http://www.sgs.com/en/Terms-and-Con- ronic Documents at http://www.sgs.com/en lity, indemnification and jurisdiction issues reflects the Company's findings at the tim y's sole responsibility is to its Client and and obligations under the transaction do ral of the Company. Any unauthorized alte nd offenders may be prosecuted to the fulle the sample(s) tested and such sample(s) a sting /inspection report & certificate, ple	ditions.aspx and, for elect /Terms-and-Conditions/Tri is defined therein. Any hol he of its intervention only this document does not cuments. This document eration, forgery or falsific est extent of the law. Unle re retained for 30 days on	ronic format documents, <u>erms-e-Document.aspx</u> . Ider of this document is and within the limits of exonerate parties to a t cannot be reproduced cation of the content or ess otherwise stated the Iy.	

Member of the SGS Group (SGS SA)

No. : CZIN2303000023CM-01

Date: Mar 27, 2023

Page: 2 of 6

Summary of Results:


No.	Test Item	Test Method	Result	Conclusion
1	Sound Absorption Coefficient	EN 15102:2019 Clause 4.7 & EN ISO 354:2003	See Result	/

Note: Pass: Meet the requirements;

Fail: Does not meet the requirements;

/: Not Apply to the judgment.

Original Sample Photo(s):

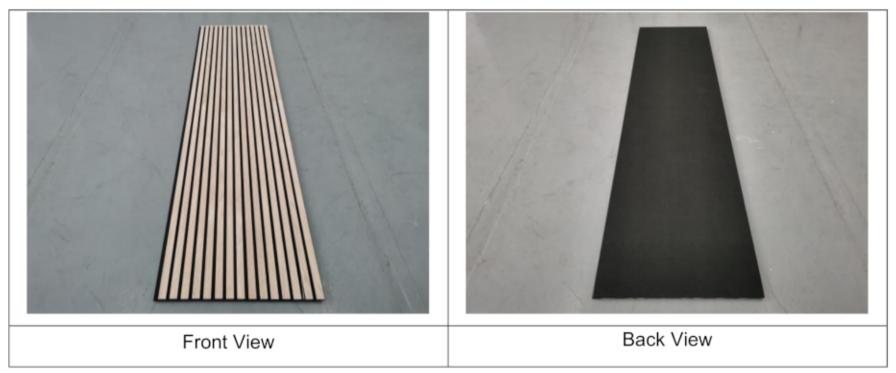



No. : CZIN2303000023CM-01

Date: Mar 27, 2023

Page: 3 of 6

Test Item: Sound Absorption Coefficient

I. Test Method

EN 15102:2019 Decorative wallcoverings - Roll form, Clause 4.7 - Sound absorption

EN ISO 354:2003 Acoustics - Measurement of sound absorption in a reverberation room

II. Sample Details

Dimensions	2400mm×600mm×21mm
Surface Density	About 7.53kg/m ²

III. Test Condition

Ambient Temperature	15.0°C	Relative Humidity	86.8%RH	
Volume Reverberation	260m ³	Test Area	10.8m ²	
Room	200110	Test Area	(3.6m×3.0m)	
Description of Test	The installation of samples refers to type E mounting.			
	The samples are installed in the reverberation room, use baffle to			
Arrangement	enclosure. 100mm back cavity.			




No. : CZIN2303000023CM-01

- Date: Mar 27, 2023
- Page: 4 of 6

IV. Test Result

Frequency,	Absorption	
Hz	Coefficient, α_s	
100	0.16	
125	0.23	
160	0.21	
200	0.39	
250	0.47	
315	0.60	
400	0.78	
500	0.95	
630	1.00	
800	0.98	
1000	0.89	
1250	0.75	
1600	0.71	
2000	0.85	
2500	0.83	
3150	0.83	
4000	0.80	
5000	0.78	
ās	0.68	
NRC	0.80	

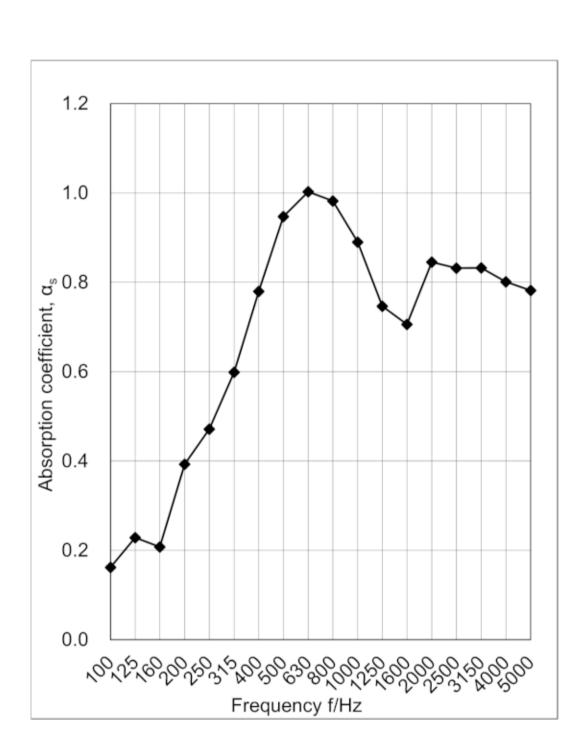




No. : CZIN2303000023CM-01

Date: Mar 27, 2023

Page: 5 of 6

Frequency/Hz	Reference curve	Practical sound absorption coefficient,	Weighted sound absorption coefficient,	Sound absorption
	Curve	$\alpha_{ m p}$	α _w	classes
125	-	0.20		
250	0.60	0.50		
500	0.80	0.90	0.80	Class B
1000	0.80	0.85	0.00	01033 D
2000	0.80	0.80		
4000	0.70	0.80		

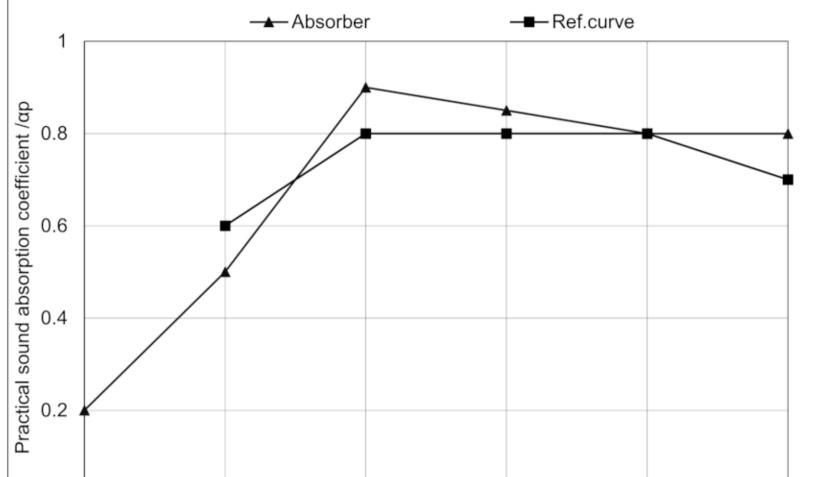

0					
12	25 25	50 500	100	0 2000	4000
		Freq	uency f/Hz		



No. : CZIN2303000023CM-01

Date: Mar 27, 2023

Page: 6 of 6

V. Weighted Sound Absorption Coefficient

Calculated according to EN ISO 11654:1997:

Average Absorption Coefficient $\bar{\alpha}_s$ (100Hz~5000Hz): 0.68

Noise Reduction Coefficient: NRC=0.80

Weighted sound absorption coefficient: α_w =0.80

Sound absorption classes: Class B

Note:

- 1. According to EN ISO 11654:1997, Sound absorption classes is five: Class A α_w =0.90;095;1.00 Class B α_w =0.80;0.85 Class C α_w =0.60;0.65;0.70;0.75 Class D α_w =0.30;0.35;0.40;0.45;0.50;0.55 Class E α_w =0.15;0.20;0.25 Not classified α_w =0.00;0.05;0.10
- NRC is the arithmetic average of absorption coefficient contained four octave frequency bands (250, 500, 1000, 2000 Hz).
- This declaration of conformity is only based on the result of this laboratory activity, the impact of the uncertainty of the results was not included.

******** End of report*******

